


# CrystaLatch™ Fiber Optic Polarization Switch



DATASHEET

[Return to the Webpage](#)

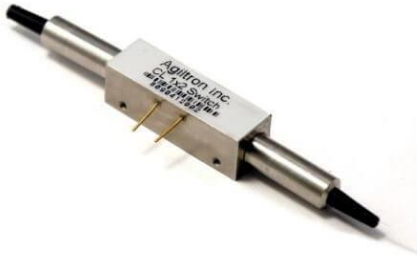

## Features

- No moving part
- Fast switching
- Low IL
- Miniature Size

## Applications

- Test instrument
- Sensor



**Legal notices:** All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 06/19/26

The CL Series polarization switch can quickly switch the incoming SOP between two orthogonal polarization states (SOPs). This is achieved using patented non-mechanical configurations and activated via an electrical control signal. Latching operation preserves the selected SOP after the drive signal has been removed. The all-solid-state CL polarization fiber optic switch features low insertion loss, high extinction ratio, fast switching, and extremely high reliability and repeatability. The input is PM fiber; the polarization is aligned with the slow axis. It is unidirectional.

The output could be either PM or SM fiber. For PM fiber, the connector key is aligned with the slow axis.

An electronic driver is available.

The magneto-optical crystals used in the CL switches have no fatigue nor drift effect.

## Specifications

Parameter	Min	Typical	Max	Unit	
Operation Wavelength <sup>[1]</sup>	1520	1550	1580	nm	
	1295	1310	1325		
Insertion Loss <sup>[2]</sup>		Single stage	0.7	1.0	dB
		Dual stage	1.2	1.5	
SOP Tolerance		± 1.0 <sup>[1]</sup>	± 2.5 <sup>[3]</sup>	degree	
Return Loss	50	55		dB	
Extinction Ratio		Single stage	18	25	dB
		Dual stage	30	35	
Optical Response (rise, fall)		10	20	µs	
Repetition Rate			2K	Hz	
Operating Temperature	-5		70	°C	
Storage Temperature	-40		85	°C	
Optical Power Handling		300	500	mW	
			2 <sup>[4]</sup>	W	
Durability	10 <sup>15</sup>			cycles	

### Notes:


- [1]. Wider waveband version is available with the degraded performances in insertion loss and extinction ratio.
- [2]. Measured at room temperature without connectors
- [3]. It may be increased at temperature other than room temperature
- [4]. High power version is available

# CrystaLatch™ Fiber Optic Polarization Switch



## DATASHEET

### Mechanical Dimensions (Unit: mm)

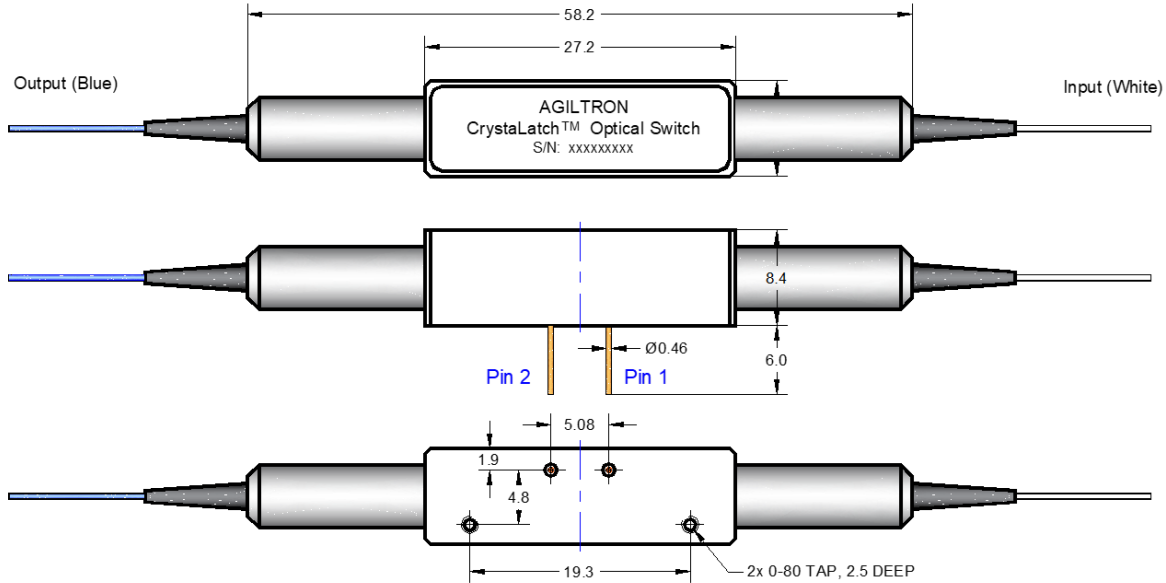

\*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

### Electrical Driving Information

The polarization switch is actuated by applying a polarity voltage pulse on a paired PINs. Applying one polarity pulse, the output light beam polarization is one status. Applying a reversed polarity pulse, the output light beam polarization is rotated by 90 degrees. The status is kept until the next pulse.

Parameter		Minimum	Typical	Maximum	Unit
Drive Pulse Voltage <sup>[1]</sup>	Single stage	2.3	2.5	2.7 <sup>[1]</sup>	V
	Dual stage	4.5	5.0	5.5	
Drive Current		110	140	195	mA
Pulse Duration		0.2	0.3	0.5	ms

[1]. Over this value will damage the device

#### Driving Table

Optical SOP	Pin 1	Pin 2
Original polarization	0	+
90° rotation	+	0

“+” is Voltage pulse.

#### Note:


The driving voltage value is transient voltage with a full load. The driver circuitry needs to provide sufficient current (~300mA) during the switching. Inside the switch core is an electromagnet with a residual magnetic field. The residual magnetic field will be established when an electrical current flows in one direction through the coil for a sufficiently long period. The residual magnetic field latches the switch state even without applying a voltage (the current flow stopped). Flowing a current in the opposite direction for a sufficient time changes the switch stage by establishing a reversal magnetic field. The coil is forgiving to the driver unless one burns it by applying a higher voltage or a current for too long (day). The switch can also be operated at high repetition rates of kHz, where the residual magnetic field may not be fully established.

# CrystaLatch™ Fiber Optic Polarization Switch




## DATASHEET

### Typical Switching Response

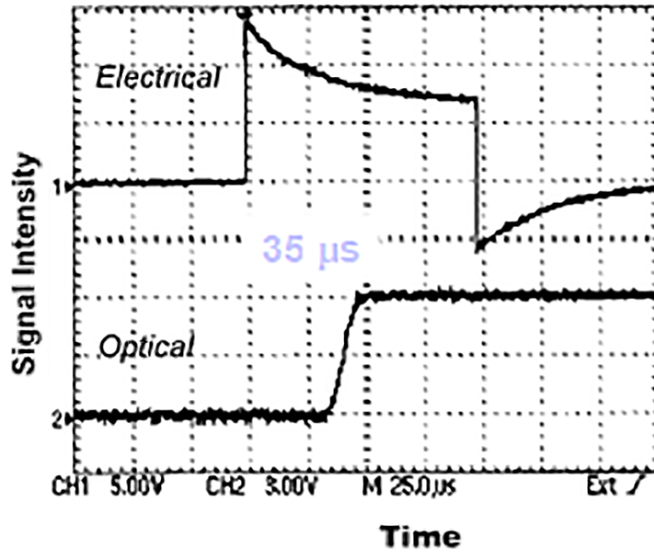

### Typical Loss Change of 1x2 vs Switching Numbers

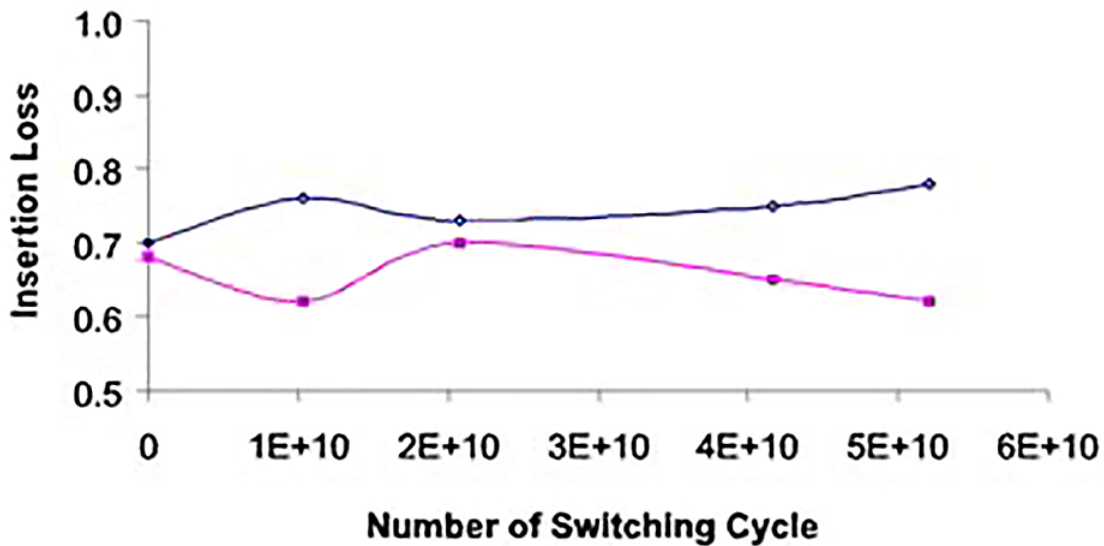

# CrystaLatch™ Fiber Optic Polarization Switch



## DATASHEET

### Ordering Information (Part Number)

Prefix	Type	Configuration	Fiber coverage	Wavelength <sup>[1]</sup>	Input Fiber	Output Fiber	Fiber Length	Connector <sup>[2]</sup>
CLPS-	1 1	Single stage = 1 Dual stage = 2	Bare fiber = 1 Loose tube = 3	1550 nm = 1 1310 nm = 3 Special = 0	PM 1550 = B PM 1310 = D Special = 0	PM 1550 = B SMF-28 = 1 Special = 0	0.25m = 1 0.5m = 2 1.0m = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 LC/APC = A LC/UPC = U Special = 0

[1]. Wider bandwidth version is available under customization.

[2]. The default connector configuration uses fiber with 0.9 mm buffer protection. The connector cannot be installed directly onto bare fiber because the bare fiber is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer may remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5 W for SMF-28 fiber and decreases further for smaller-core fibers.

#### Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

#### Fiber Cleanliness

Fibers with smaller core diameters (<5 μm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

#### Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.