

Fiberoptic Electric Field Sensor

DATASHEET



Features

- No metal parts
- Passive
- Miniature
- Optical fiber readout
- High shock/vibration resistance
- High sensitivity
- Wide bandwidth
- High damage threshold

Applications

- PAA radar tests
- Antennas characterization
- Plasma process control
- Military Active Denial Systems
- HPM, HRI and EMP systems

This EOFS Electric-field sensor is based on an electro-optical crystal packaged with a dual fiber collimator and made entirely of non-metallic materials. It features perturbation-free, wide frequencies coverage from Hz to microwave up to 40GH, high electrical damage threshold (>10 MV/m and 10W/cm² power density), and harsh environment compatibility, including temperature, pressure, liquid, X-rays, and gamma rays. We produce sensors with both horizontal and particular sensors so that one can detect electrical fields in 3D. The readout is via a laser through optic fibers. It is ideally suitable to remotely and non-intrusively measure electric fields in a demanding application scenario.

We offer several package configurations for general use, liquid immersion, vacuum chamber compatibility, permittivity matching, and 3D vector sensing. Custom design is our specialty.

Specifications

E-field Sensor		Typical	Max	Unit
Frequency Bandwidth	Ultra-high	18	40	GHz
	High	7		GHz
	Low		250	MHz
Sensitivity ^[1]	Ultra-high frequency	20		mV/m-Hz ^{1/2}
	High frequency	10		mV/m-Hz ^{1/2}
	Low frequency	5		mV/m-Hz ^{1/2}
Cut-off Frequency	Ultra-high frequency	10		MHz
	High frequency	10		MHz
	Low frequency	30 ^[2]		Hz
Maximum detectable E-field ^[3]		200		kV/m
Damage E-field			5	MV/m
Package Dimension		See design		

Note:

[1] Defined by measuring with a 1550nm laser at 20mW and 100MHz

[2] Sensitivity drops significantly at f < 50Hz


[3] Possible to be increased up to 2MV/m in special LF version, please contact us

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. Agiltron, The Power to Transform and Agiltron logo are trademarks of Photonwares Corporation. © 2009, 2012 IPG Photonics Corporation. All rights reserved.


Fiberoptic Electric Field Sensor

DATASHEET

Mechanical Dimensions (mm)

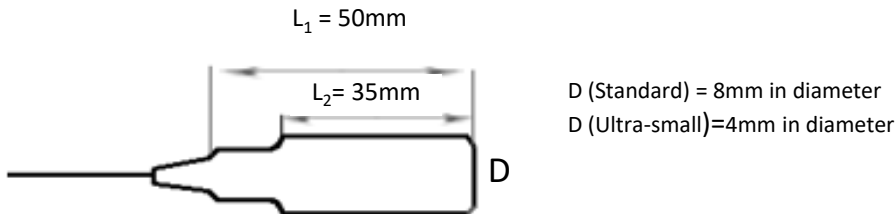


Custom package examples

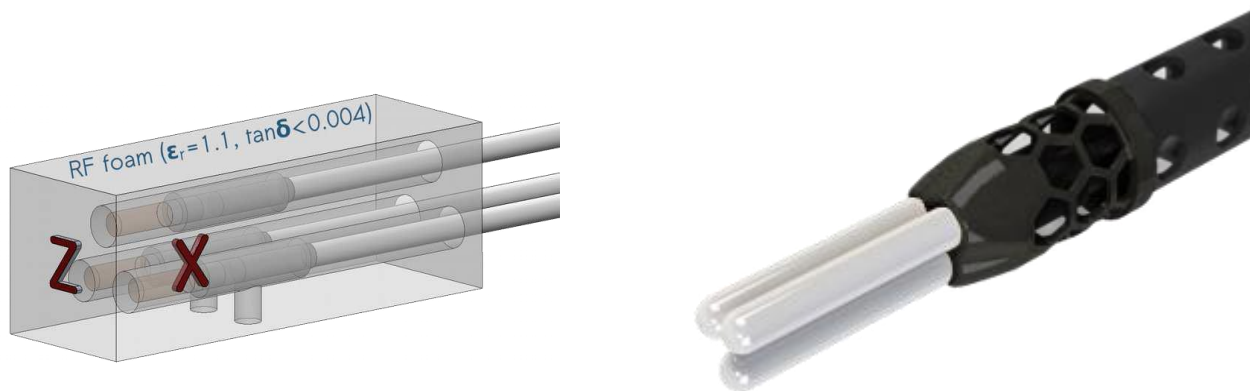

Application Note

1) System Configuration of E-field Measurements

The E-field detection by using a fiber optic sensor (EOFS) and the readout system is straightforward, as shown below. The Photonic E-field measurement system (PEFS, sale separately) is composed of one laser diode (LD), one photodetector (PD) with the amplifier, and an oscilloscope or spectrum analyzer (not shown in the following schematic diagram).

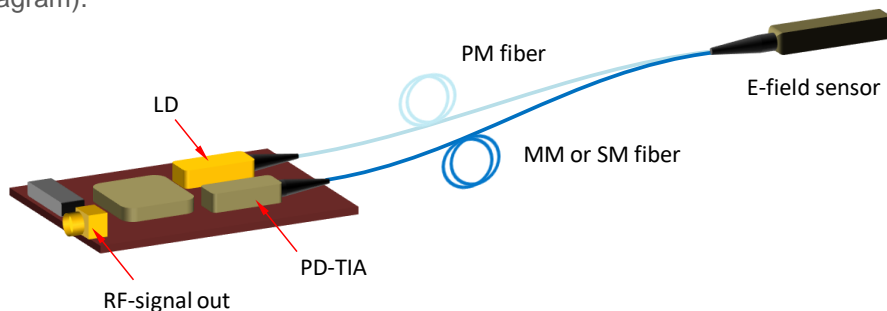

The fiber-coupled LD is connected to the fiber E-field sensor, and the output of the probing laser from the sensor is connected to the PD in the readout module (PEFS). The electric signal from PD should be connected to either the oscilloscope or the spectrum analyzer for measuring the E-field. Because the output electric signal is highly dependent on the laser power, PD, and TIA performances, the measurement set-up must be calibrated for the quantitative measurements.

Fiberoptic Electric Field Sensor

DATASHEET

2) EOFS Calibration

For characterizing/calibrating the fiber optic sensor EOFS and the module, the TEM cell or parallel electrodes must be used, as schematically shown in Fig.2 and Fig.3 respectively.

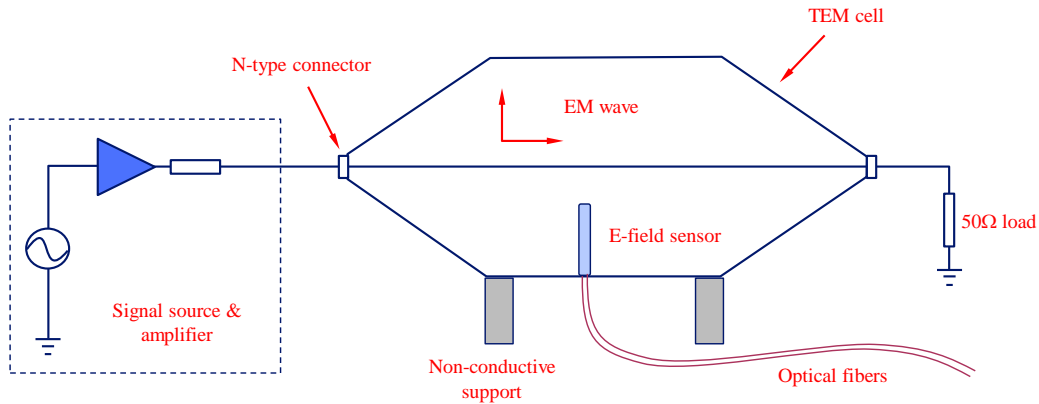


Figure 2: Schematic diagram of EOFS (high frequency) set up in TEM cell

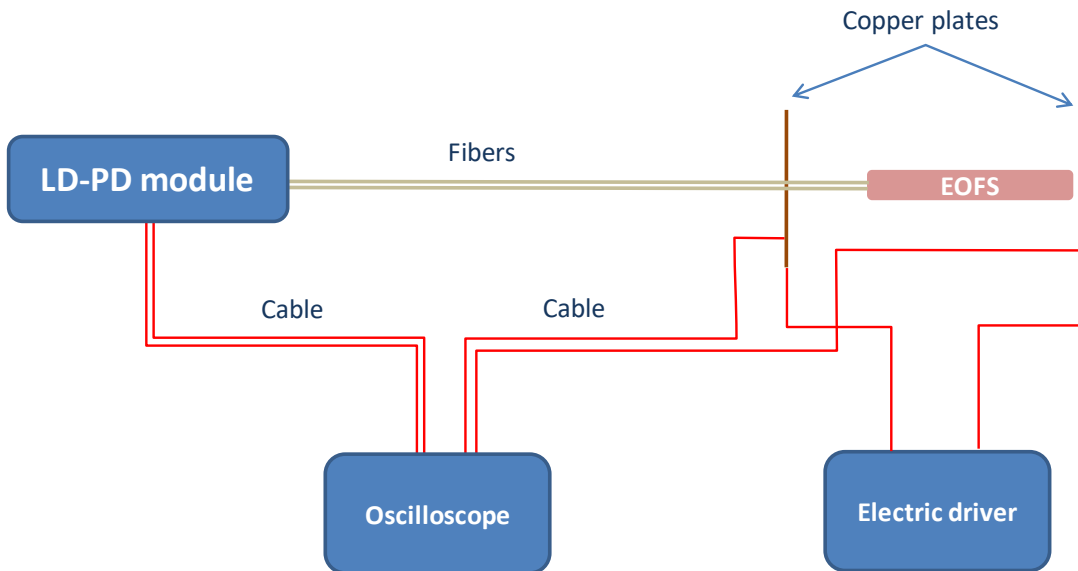


Figure 3: Schematic diagram of low frequency E-field measurement

Fiberoptic Electric Field Sensor

DATASHEET

3) System Calibration

The sensor’s responsivity highly depends on the frequency and the system parameters, such as the laser power, and the PD’s responsivity and TIA gain in the laser readout module (PEFS). So, the onsite calibration in the measurement system of EOFS and PEFS is highly recommended to quantitatively measure the E-field strength, once the whole system is set up.

The electric signal can be expressed approximately on the function of E-field strength as follows.

$$\Delta V(f) = \alpha E(f) + \beta E^2(f)$$

Where α, β are the coefficients to be determined through the calibration test, which depend on the input laser power and TIA gain. E is the electric field strength (V/m), f is the frequency of the E-field.

Ordering Information

Prefix	Type	Configuration	Package	Fiber Cover	Fiber Type (input)	Fiber Type (output)	Fiber Length	Connector
EOFS-	LNGITUD ^[2] 7GHz =11 LNGITUD ^[2] 250MHz=12 LNGITUD ^[2] 18GHz =18 LNGITUD ^[2] 40GHz = 04 LNGITUD ^[2] Special = 00 LTRL ^[3] 7GHz = L1 LTRL ^[3] 250MHz =L2 LTRL ^[3] 18GHz = L8 LTRL ^[3] 40GHz = L4 LTRL ^[3] Special = L0	Ambient = 1 Liquid = 2 Vacuum = 3	Standard=1 Small ^[4] =2 Ultrasmall ^[5] =3 Special=0	Bare fiber=1 900µm tube=3 Special=0	Panda PM=1 Special=0	62.5/125um fiber=1 SMF-28=2 Special=0	0.25m=1 0.5m=2 1.0m=3 Special=0	FC/PC=2 FC/APC=3 SC/PC=4 SC/APC=5 Special=0

[1]. For frequencies >10GHz, the output fiber must be SMF-28.

[2]. Longitudinal E-field

[3]. Lateral E-field

[4]. Small: 4.5mm x 4.5mm x 50mm.

[5]. Ultra-Small: 3.5mmx3.5mmx50mm.

Red is specially made.

NOTE:

Additional fiber cable extensions can be purchased through this [link: https://agiltron.com/category/optical-fiber-patch-jump-cables/](https://agiltron.com/category/optical-fiber-patch-jump-cables/)