

Fiber-Fiber™ 1xN Mini Optical Switch

(Large core fiber, Broad, Bidirectional, High power)



DATASHEET

BUY NOW



Features

- Unmatched Low Cost
- Very Broad Spectral Range
- High Isolation
- High Reliability
- Epoxy-Free Optical Path

Applications

- Signal management
- Sensor
- Spectroscopy
- High Power Laser
- Instrumentation

The Fiber-Fiber™ Series 1xN Optical Switch connects optical channels by directly aligning a pair of fibers. This achieved by using a precision mini motor. Latching capability preserves the selected optical path after the drive signal has been removed. The compact FF series switches has passed space application qualification. Agiltron unique design offers low insertion loss covering an ultrabroad spectral band from 300 to 5000 nm with various fiber core size from 100mm to 1500mm. The switch is ideal for sensor and spectroscopy applications with bidirectionality.

The driving PCB has interfaces with a computer through USB or RS232.

Lightpath in the device is bidirectional.

Specifications

Parameter	Min	Typical	Max	Unit
Operation Wavelength	300		5000	nm
Insertion Loss ^[1]		0.5	1.0	dB
Wavelength Dependent Loss ^[2]		0.05	0.3	dB
Polarization Dependent Loss		0.03	0.10	dB
Return Loss ^[5]	35			dB
Cross Talk	60			dB
Operating Voltage		5	5.5	VDC
Power Consumption			2	W
Switching Type	Latching			
Switching Time ^[3]		0.8		s
Durability	10 ⁷			cycle
Operating Temperature	0		70	°C
Optical Power Handling ^[4]			0.5	W
Storage Temperature	-40		85	°C
Fiber Type	≥ Ø100 µm core fiber			
Package Dimension	See Mechanical Dimensions			

Notes:

- [1]. Measured without connectors for 1xN. For multimode fiber, use a laser source with CPR<15
- [2]. Within 100 nm bandwidth
- [3]. Defined for speed between the adjacent channels
- [4]. High power version available
- [5]. For 50 µm core. Larger core will reduce the value, index matching fluid version increase the return loss

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 04/04/24

Fiber-Fiber™ 1xN Mini Optical Switch


(Large core fiber, Broad, Bidirectional, High power)




DATASHEET

Mechanical Dimensions (Unit: mm)


Package A for < 400 μm Core fiber

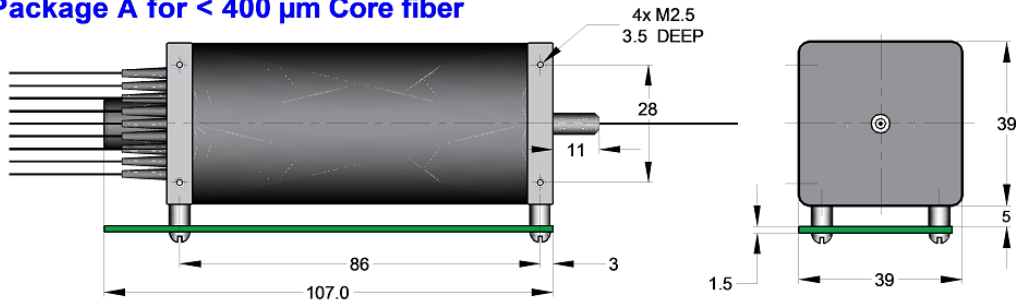

Package B for 300 μm \leq Core < 600 μm

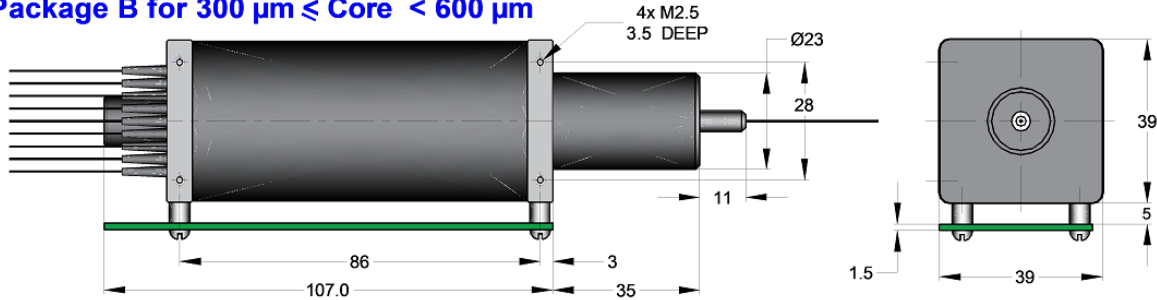

Package C for $\geq 600 \mu\text{m}$ Core fiber

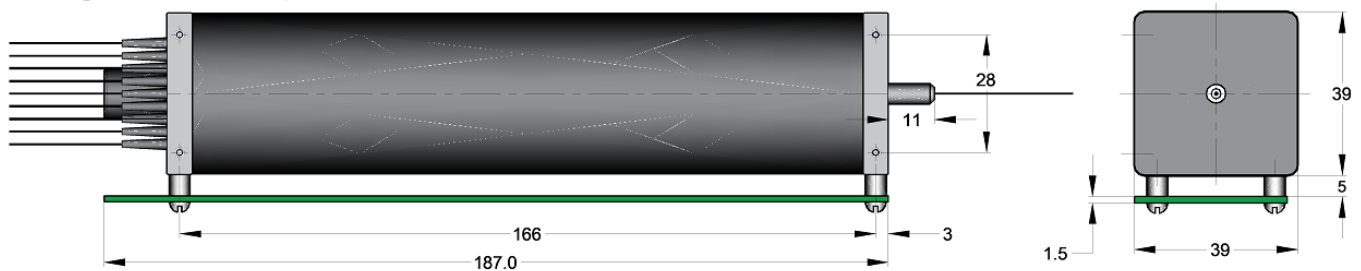

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Fiber-Fiber™ 1xN Mini Optical Switch


(Large core fiber, Broad, Bidirectional, High power)



DATASHEET

Mounting and Electrical Connection for Package A/B (Unit: mm)

- The switch can be mounted through the tapped hole on the side or on to a bottom PCB

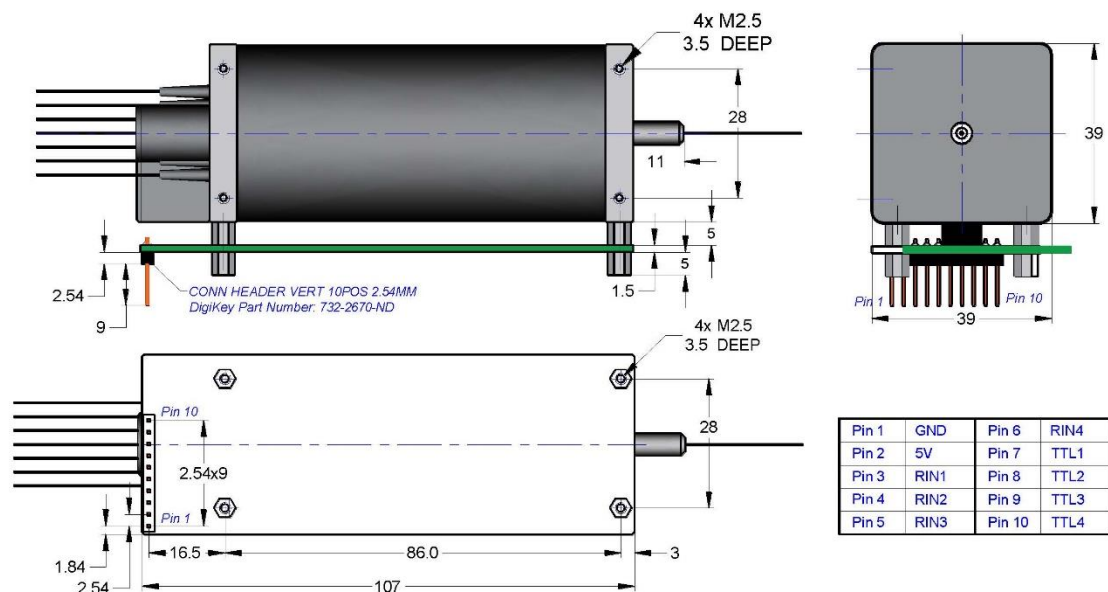

- The switch can be powered and TTL controlled via the 10 pins

Name	Direction	Description
GND	Ground	Provide power to the switch
5V	Power	
RIN1	Output	
RTN2	Output	
RTN3	Output	IORTN-I3RTN can be used to read switch position. I3RTN is the highest bit, while IORTN is the lowest one.
RTN4	Output	
TTL1	Input	
TTL2	Input	
TTL3	Input	I0-I3 set the switch position. Up to 16 different statuses are available for this driver board. I3 is the highest bit of input status, while I0 is the lowest one. For example, I3 -> 0, I2 -> 0, I1 -> 0, I0 -> 1, change to status 2. I3 -> 1, I2 -> 1, I1 -> 1, I0 -> 1, change to status 16.
TTL4	Input	

Computer Interface

Computer controlling kit with USB or RS232 interfaces and Windows™ GUI.

Fiber-Fiber™ 1xN Mini Optical Switch

(Large core fiber, Broad, Bidirectional, High power)



DATASHEET

Ordering Information

Prefix	Type	Wavelength	Configuration	Optical Power	Fiber Core	Fiber Cover	Fiber Length	Connector
FFMU- ^[1]	1x2 = 02	800~1100 = 1	Single = S	0.5 W = 1	50/NA.22 = 5	Bare fiber = 1	0.25 m = 1	None = 1
FFMR- ^[2]	1x3 = 03	1500~1700 = 2	Dual = D	Special = 0	62.5/NA.22 = 6	2 mm Jacket = 2	0.5 m = 2	FC/PC = 2
FFMT- ^[3]	1x4 = 04	300~600 = 6	Special = 0		105/NA.22 = E	900 um tube = 3	1.0 m = 3	FC/APC = 3
	...	600~800 = 8			200/NA.22 = F	Special = 0	Special = 0	SC/PC = 4
	1x42 = 42	1100~1600 = B			300/NA.22 = G			SC/APC = 5
	2x2 = 2A	Special = 0			400/NA.22 = H			ST/PC = 6
	2x2Bypass = 2B				600/NA.22 = J			LC/PC = 7
	Special = 00				800/NA.22 = K			SMA905 = 9
					Special = 0			LC/APC = A
								LC/UPC = U
								Special = 0

[1]. FFMU: Fiber-Fiber 1xN Mini Switch with USB driver.

[2]. FFMR: Fiber-Fiber 1xN Mini Switch with RS232 driver.

[3]. FFMT: Fiber-Fiber 1xN Mini Switch with TTL driver.

[4]. Package A is for < 300 µm core fiber. Package B is for ≥ 300 µm core fiber. Package C is for ≥ 600 µm core fiber.

Note: Red is special order

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters (<5 µm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.