

**BUY NOW** 

# MEMS 8x8 Fiber Optical Switch

(Latching and Non-latching Series, SM, PM)

(Protected by U.S. patent 8,203,775, 20170184840A1, and other patents pending)

## Features

- Reliable
- Compact
- No Drift
- Latching

## Product Description

The MEMS 8x8 Series Fiber Optic switch redirects incoming optical signals into 4 selected output fibers with blocking. This is achieved using a patented MEMS configuration and activated via an electrical control signal. It uniquely features highly reliable thermally activated micro-mirror, latches to preserve the selected optical path after the drive signal has been removed, and no drift over time. Light path is bidirectional and non-blocking. It has a dual 8x8 and ad/drop optional configurations.

This novel design offers unprecedented long term high stability as well as fault-safe latching reliability. The switch is available in both device format and integrated with driving electronics.



## Performance Specifications

MEMS 8x8 Switch	Min	Typical	Max	Unit
Operation Wavelength	Single Band: 780, 850, 980, 1060, 1310, 1550 Broad Band: 1260-1620			nm
Insertion Loss <sup>[1], [2]</sup>		1.7	2.2	dB
Polarization Dependent Loss			0.2	dB
Extinction Ratio (PM)	18	25		dB
Return Loss <sup>[1], [2]</sup>	50			dB
Cross Talk <sup>[1], [2]</sup>	50			dB
Wavelength Dependent Loss		0.2	0.3	dB
Response Time		5	10	ms
Repetition Rate		5		Hz
Repeatability			±0.05	dB
Durability	10 <sup>9</sup>			Cycle
Operating Temperature <sup>[3]</sup>	-5		70	°C
Storage Temperature	-40		85	°C
Optical Power Handling		300		mW

1. IL could be 0.2dB higher at the wavelength close to the edge of broad waveband.  
 2. Excluding connectors.  
 3. -40°C Operating Temperature version is available.



Revised on 03/15/22  
 (Click here for latest revision)

# MEMS 8x8 Fiber Optical Switch

(Latching and Non-latching Series, SM, PM)

## Mechanical Dimensions (Unit: mm)

TBD


\*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

## Control Interface Information

1. The control interface is Micro-USB with GUI and/or command list. RS232 can be an alternative option with the adaption cable of converter, but USB and RS232 can't be implement on same driver.
2. The electric power consumption in No-latching version is much more than Latching version.

## 10<sup>9</sup> Switching Cycle Test

We have tested MEMS 1x2 switch at the resonant frequency ~300Hz for more than 40 days, as shown in the attachment, which corresponding over 10<sup>9</sup> switching cycles. The measurements show little changes in Insertion loss, Cross Talk, Return loss etc, all parameters are within our specs.

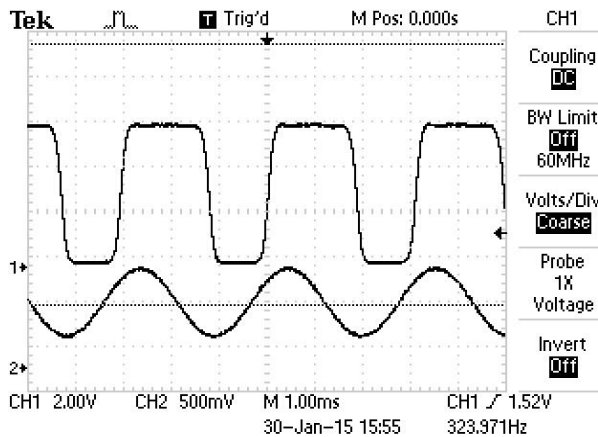


# MEMS 8x8 Fiber Optical Switch

(Latching and Non-latching Series, SM, PM)

## Functional Diagram

### MEMS 8x8 Switch

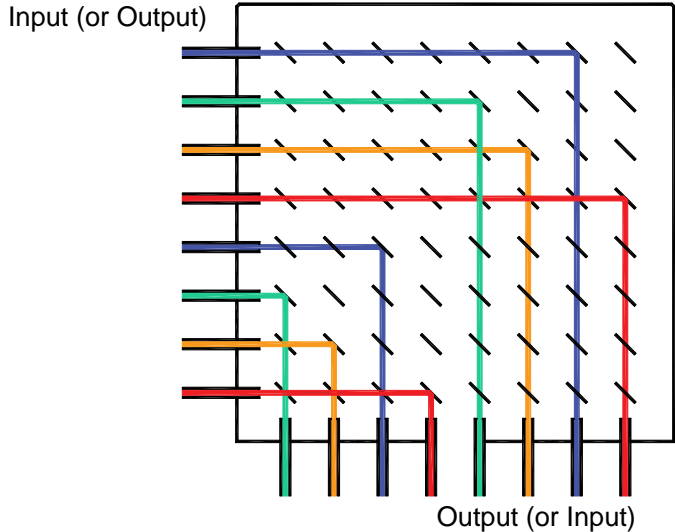

## Ordering Information

MEMS-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Type	Wavelength	Switch	Package	Fiber Type	Fiber Length	Connector		
	2x8=28 3x8=38 4x8=48 5x8=58 6x8=68 7x8=78 8x8=88 Special=00	1260~1620=B 1060=1 C+L=2 1310=3 1550=5 780=7 850=8 1310/1550=9 Special=0	Latching=1 Non-Latching=2	With Driver <sup>[1]</sup> =1	SMF-28=1 PM1550/250=B PM1310/250=D PM980/250=E PM850/250=F Special=0	900 um tube=3 Special=0	0.25m=1 0.5m=2 1.0m=3 Special=0	None=1 FC/PC=2 FC/APC=3 SC/PC=4 SC/APC=5 ST/PC=6 LC=7 Duplex LC=8 Special=0	

[1]. The driving electronics has USB Micro-B interface and 5 VDC power supply interfaces. The more detail is available upon purchase.

