

# Variable Photonic Time Delay System

up to ms long delay, ns fast delay change, 25-bit highest resolution



The Variable Photonic Time Delay system (SLTD or LLTD) is a turn-key unit that provides true-time delay with a fiber input and output. Perfected over 15 years, it uniquely features a long delay of up to ms, ultra-fast (ns) delay variation speed, and up to 25 bits high resolution. Internally, the input optical signal propagates through various fiber optic loops before exits. Delay time can be digitally varied by switching to pass through N fiber segments, therefore providing N-bit resolution. Delay length and system performance can be tailored to meet customer-specific requirements with great flexibility. The optical loss difference can be compensated by incorporating amplifications in long fiber segments. We offer three types of fiber optical switches: MEMS (ms), CL (ms), and NS (ns) to meet application requirements. USB/GUI or RS232 interface is a standard while high-speed switching is controlled by TTL through a D connector. Front Touch-screen computer is also a choice for system control.

The system delivers unmatched performance for radar testing, signal processing, phased array antennas, and phase noise testing with greater flexibility than traditional coax or waveguide solutions.

## Features

- Switching Option Available
- Smaller Size and Less Weight
- 0.1 - 40 GHz Bandwidth
- Flat Phase Response
- Minimal Triple-Transit Echoes
- Low Link Loss Options
- Low-Temperature Sensitivity

## Applications

- Radar System Testing
- Phased Array Antennas
- Signal Processing
- Electronic Warfare (EW) Systems

## Specifications

Parameter	Min	Typical	Max	Unit	
Wavelength	1310		1550	nm	
Delay Range	0.01		1000	μs	
Delay Accuracy <sup>[1]</sup>	0.1	1		ns	
Delay Increment	0.1			ns	
Delay Resolution		20	25	Bit	
System Intrinsic Delay <sup>[2]</sup>		100	200	ns	
Delay Changing Speed	MEMS	10	20	ms	
	CL	50	100	μs	
	NS	0.1	0.3	μs	
Cross Talk	MEMS	50	60	70	
	CL	40	45	50	dB
	NS	30	35	40	
Repetition Rate	MEMS		10	Hz	
	CL		2	KHz	
	NS		1	MHz	
Insertion Loss <sup>[3]</sup>	0		TBD	dB	
Insertion Loss Uniformity <sup>[4]</sup>		0.5	1	dB	
Return Loss <sup>[4]</sup>	50			dB	
Optical Power Handling		100	500	mW	
Operating Temperature	0		60	°C	
Storage Temperature	-40		85	°C	
Power Supply	110		240	AVC	
Power Consumption			250	W	
Size	19" mount rack				


[1] It is defined @ maximum delay <=10us.  
 [2] Depending on the bit number N, such as 100ns up to 19-bit.  
 [3] The loss can be compensated by optical amplifiers  
 [4] Between delaying or bypassing at same bit delay loop

# Variable Photonic Time Delay System

up to ms long delay, ns fast delay change, 25-bit highest resolution

## Optical Path Diagram

Switchable fiber loops in series

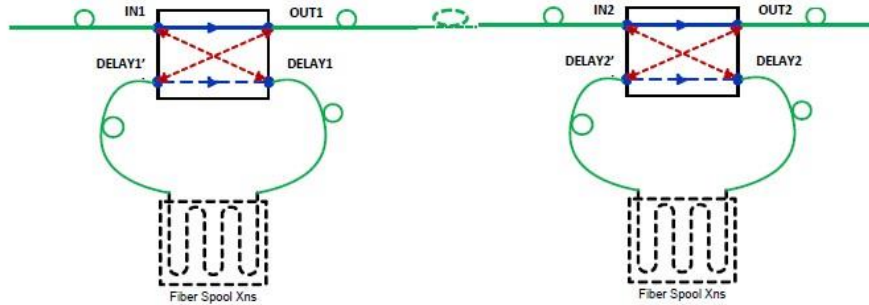

The variable time delay module selectively routes optical signals through N fiber segments having different lengths. Each fiber segment is defined to have the delay as

$$\Delta T_i = 2^{(i-1)} \delta T, i = 1, 2, \dots, N$$

Where  $\delta T$  is the increment of time delay. Therefore, the module provides N-bit of digitally variable time delay, having the total time delay as

$$\Delta T_{Total} = (2^N - 1) \delta T$$

N and  $\delta T$  are defined by the customer.

## Enclosure Dimension (mm)


Typical 6U 19" rack for 16-19 bit system with the maximum delay of 0.1ms.

Front Panel (TBD)



- a. Width of panel: 482mm
- b. Width of rack: 420mm
- c. Max. deep of rack: 550mm

Rear Panel (TBD)

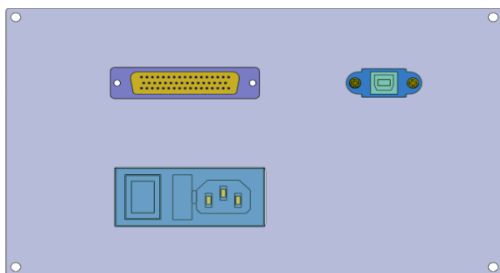



# Variable Photonic Time Delay System

up to ms long delay, ns fast delay change, 25-bit highest resolution

## Order Information / Part Number

<input type="checkbox"/> <input type="checkbox"/> TD-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<b>0</b>	<input type="checkbox"/>
	Resolution	Wavelength	Switch Type	Package	Fiber Type <sup>[1]</sup>	Control <sup>[2]</sup>	Delay Range	Connector
Standard = SL	19bit = 19 17bit = 17 16bit = 16	1550nm = 5 1310nm = 3 Special = 0	CL/Latch = 2 NS/non-latch = 3 MEMS/non-latch=4 MEMS/latch=5 CL+MEMS=6 Special = 0	3RU=3 4RU=4 5RU=5 6RU =6 7RU=7 8RU=8 Special=0	SMF-28 = 1  Dispersion compensation fiber = 2  Special=0	TTL = 1 USB = 2 RS232 = 3 TouchScreen = 5 Special = 0	Customized = 0	FC/PC=2 FC/APC=3 SC/PC=4 SC/APC=5 ST/PC=6 LC/APC=7 Special = 0
Lossless = LL	..... 9bit = A9 8bit = A8 NM = nm							

[1]: The dispersion compensated fiber must be used in the applications of long delay and high RF frequency. Please consult us on it.

[2]: Repeat rate of switching > 2kHz must use TTL control.