

SelfAlign™ Series of 1xN Fiber Optic Switch Module (bidirectional)

(Protected by U.S. patents 7224860, 6757101, 6577430 and pending patents)

Product Description

The SelfAlign Series 1xN Series optical fiber switch is based on patent pending self-groove alignment mechanism without the need for AR coating and lenses. It offers unparalleled advantages of very low loss and cost, amicable to any fiber core size, and broad wavelength operation from 300nm-2300nm. The 1xN series optical fiber switch is compliant with the Telcordia 1209 and 1221 reliability standards. The driving circuit is embedded in the package and is connected to computer through RS232, USB or RJ45 interface.

The SelfAlign 1xN optical fiber switch is suitable for multiple channel signal monitoring and signal management. The switch is bidirectional. It is not designed to maintain optical connections after electrical power is removed.



Performance Specifications

SelfAlign 1xN Switch	Min	Typical	Max	Unit
Operation Wavelength	400		1800	nm
Insertion Loss ^[1]		0.6	1.5	dB
Cross Talk	50			dB
Switch Speed (Rise, Fall) ^[2]		100		ms
Durability	10 ⁷			cycle
Polarization Dependent Loss		0.02	0.1	dB
Wavelength Dependence Loss		0.1	0.2	dB
Return Loss ^[5]	45			dB
Repeatability			0.3	dB
Power Consumption ^[3]	0.7	3.6	5	W
Operating Temperature ^[4]	-5		65	°C
Optical Power Handling ^[6]		300	500 ^[6]	mW
Storage Temperature	-40		85	°C
Power supply		100 ~240		VAC
Fiber Type		SMF-28 or 50/125um or 62.5/125um		
Package Dimension		2RU 19" Mount rack or similar		

[1]. Measured without connectors

[2]. Switching between adjacent channels

[3]. Consume minimum power during sleep time

[4]. -25 °C~75°C version is also available.

[5]. For SM. Larger core will reduce the value, index matching-fluid version increases the return loss

[6]. High power version available

Features

- Low Cost
- High Reliability
- Low Insertion Loss
- Broad Band
- Compact Design
- Low Power Switching

Applications

- Optical Signal Routing
- Network Protection
- Wavelength Management
- Signal Monitoring
- Instrumentation

SelfAlign™ Series 1xN Fiber Optic Switch Module

Module Mechanical Dimensions


2RU 19" mount rack typically. The input and output connectors are on the front panel, while the control interface and power supplier are on the rear panel.

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Control Interface and Power Supply

- RS 232
- Ethernet 10/100 with definable IP address
- USB
- GUI
- 120-220V (0.6 A) Power Input

Typical Graphic User Interface

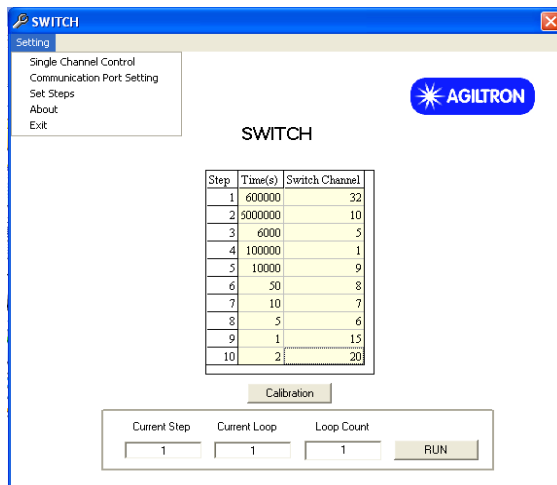

Ordering Information

LBSC-	Type	Wavelength	Switch Type	Package	Fiber Type	Connector	
<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	1x8=008 1x16=016 1x32=032 1x64=064 1x128=128 1x256 = 256 Special=000	1060nm=1 1310nm=3 1410nm=4 1550nm=5 1310/1550nm=2 650nm=6 780nm=7 850nm=8 Special=0	x	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	SMF-28 =1 MM 50/125=2 MM 62.5/125=3 PM 350 = 4 PM 405 = 5 PM 780 = 7 Special=0	Bare fiber=1 loose tube=2 Special=0	None=1 FC/PC=2 FC/APC=3 SC/PC=4 SC/APC=5 ST/PC=6 LC=7 Duplex LC=8 Quad LC=9 Special=0