

CWDM 8 Channel

850-1610 nm, 18 ITU, SM, MM, PM



DATASHEET

[Return to the Webpage](#)



Features

- Compact
- High Reliability
- Low IL, PDL, WDL & TDL

Applications

- CATV
- Test



The Coarse Wavelength Division Multiplexer (CWDM) employs thin-film coating technology and a proprietary non-flux metal-bonded micro-optics packaging design to enable optical add/drop functionality across ITU channel wavelengths from 850 to 1610 nm. It delivers low insertion loss and wide passbands at each ITU center wavelength, along with high channel isolation. The device features low temperature sensitivity and an epoxy-free optical path, ensuring high reliability and performance for polarization-maintaining systems.

Specifications

Parameter	Min	Typical	Max	Unit
Channel Number		8		
Center Wavelength	850		1619	nm
CWDM Channel Passband		-6.5		nm
Insertion Loss ^[1]		2	2.4	dB
Isolation (Adjacent Channel)			30	dB
Isolation (Non-Adjacent Channel)			40	dB
Passband Ripple			0.3	dB
Polarization Dependent Loss			0.1	dB
Polarization Mode Dispersion			0.1	ps
Maximum Optical Power			500	mW
Directivity			50	dB
Operating Temperature	-5		75	°C
Storage Temperature	-40		85	°C
Fiber Type		SM28e		
Package Dimension		90 x 76 x 8		mm

Notes:

[1]. Excluding connectors

Note: The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [\[click this link\]](#):

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 01/28/26

[+1 781-935-1200](tel:+17819351200)

sales@agiltron.com

www.agiltron.com

CWDM 8 Channel


850-1610 nm, 18 ITU, SM, MM, PM



DATASHEET

Mechanical Dimensions (mm)

A package:

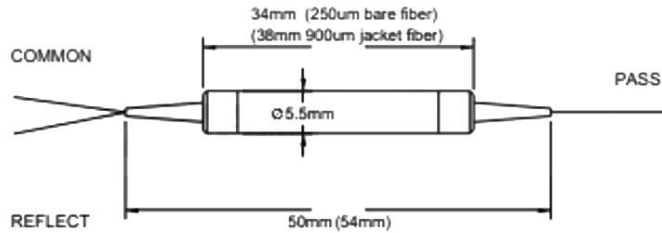

M package:




N package:



C package:



S package:

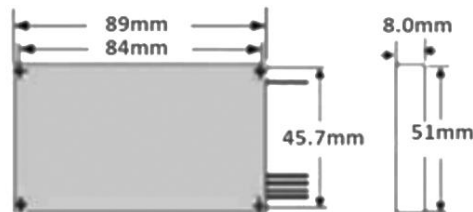

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.


CWDM 8 Channel

850-1610 nm, 18 ITU, SM, MM, PM




DATASHEET

Channel Configurations

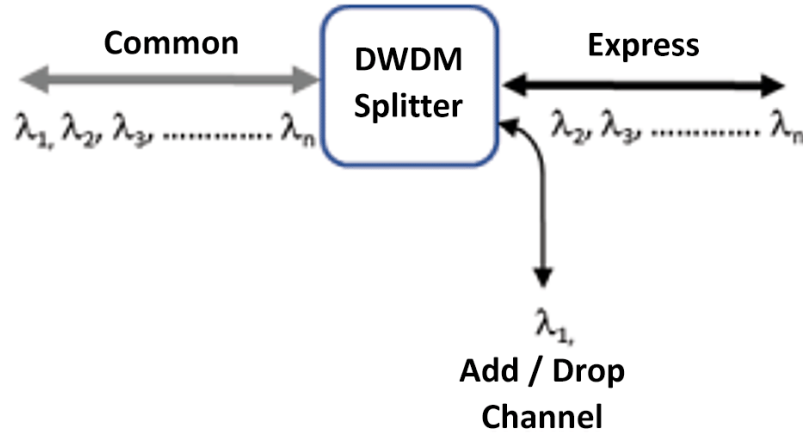

Optical Function Path Illustration

Wavelength multiplexing and Demultiplexing can be illustrated below in a single-channel optical add-drop case.

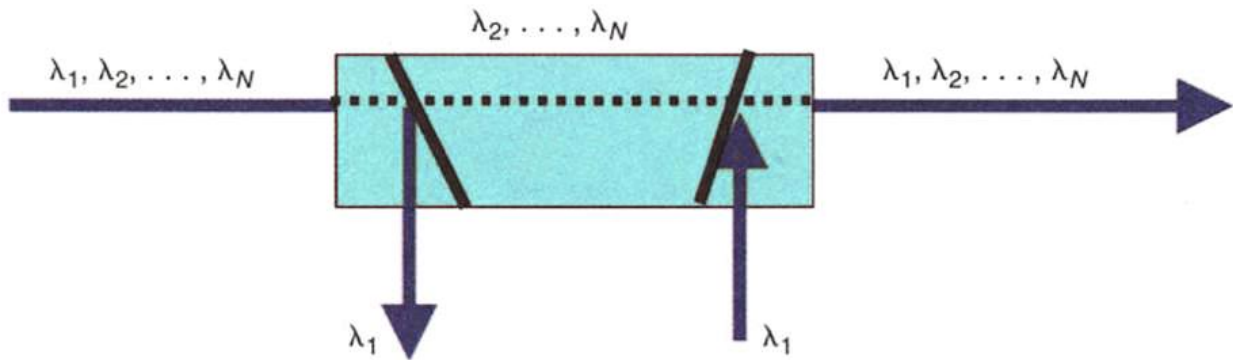

CWDM 8 Channel

850-1610 nm, 18 ITU, SM, MM, PM



DATASHEET

Ordering Information (Part Number)

Prefix	Channels	Start ITU	End ITU	Fiber Type	Fiber Cover	Fiber Length	Connector ^[1]
CWDM-	8Chan = 08 Special = 00			SMF-28 = 1 Corning XB = 2 50/120 = 3 PM1310 = 4 PM1550 = 5 Special = 0	Bare fiber = 1 900um tube = 2 3mm tube = 3 Special = 0	0.25m = 1 0.5m = 2 1.0m = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 Duplex LC/PC = 8 LC/APC = A LC/UPC = U Special = 0

[1]. The connector cannot be installed directly onto bare fiber, as it is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer can remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5 W for SM28 fiber and decreases further with smaller core fibers.

CWDM 8 Channel

850-1610 nm, 18 ITU, SM, MM, PM



DATASHEET

CWDM ITU Table following standard ITU-T G.694.2 defined center wavelengths: Red are common 8

Channel #	Wavelength (nm)
23	850
24	880
25	910
26	940
27	1270
29	1290
31	1310
33	1330
35	1350
37	1370
39	1390
41	1410
43	1430
45	1450
47	1470
49	1490
51	1510
53	1530
55	1550
57	1570
59	1590
61	1610