

# Broadband RF Power Amplifier 20-300MHz



Driver for 1D Acousto optical beam deflector/scanner

DATASHEET

[Return to the Webpage](#)



The RFPA Broadband RF Power Amplifier is designed to drive an acousto-optic beam deflector in a single direction. It features one RF input port and one RF output port. It requires a 24 V DC power supply to operate. The amplifier delivers up to 5 W (37 dBm) of RF output power across a 20 MHz to 300 MHz operating frequency range, providing stable, broadband performance for acousto-optic modulation and beam steering applications. It is designed to be driven by a function generator with 0-5V output.

## Features

- 20-300 MHz
- Up to 5W
- 24V DC power
- Small Size Package

## Applications

- Acousto optical beam deflection
- Instrument



**Legal notices:** All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 02/10/26

## Specifications

Parameter	Min	Typical	Max	Unit
Number of channels		1		ch
Frequency Range	20		300	MHz
Gain		32		dB
Max Output power		5		W
Input Impedance		50		$\Omega$
Output Impedance		50		$\Omega$
Power Supply		24VDC, 1A		
VSWR			1.8 / 1	
2nd Harmonic Distortion			-20	dBc
Max Input power			+5	dBm
Connection	Input	SMA-F		
	Output	SMA-F		
Operating Temperature	+10		+50	$^{\circ}$ C

### Notes:

External heat dissipation is required during use

**P** +1 781-935-1200

**E** [sales@agiltron.com](mailto:sales@agiltron.com)

**W** [www.agiltron.com](http://www.agiltron.com)


# Broadband RF Power Amplifier 20-300MHz



Driver for 1D Acousto optical beam deflector/scanner

## DATASHEET

### Dimensions (mm)

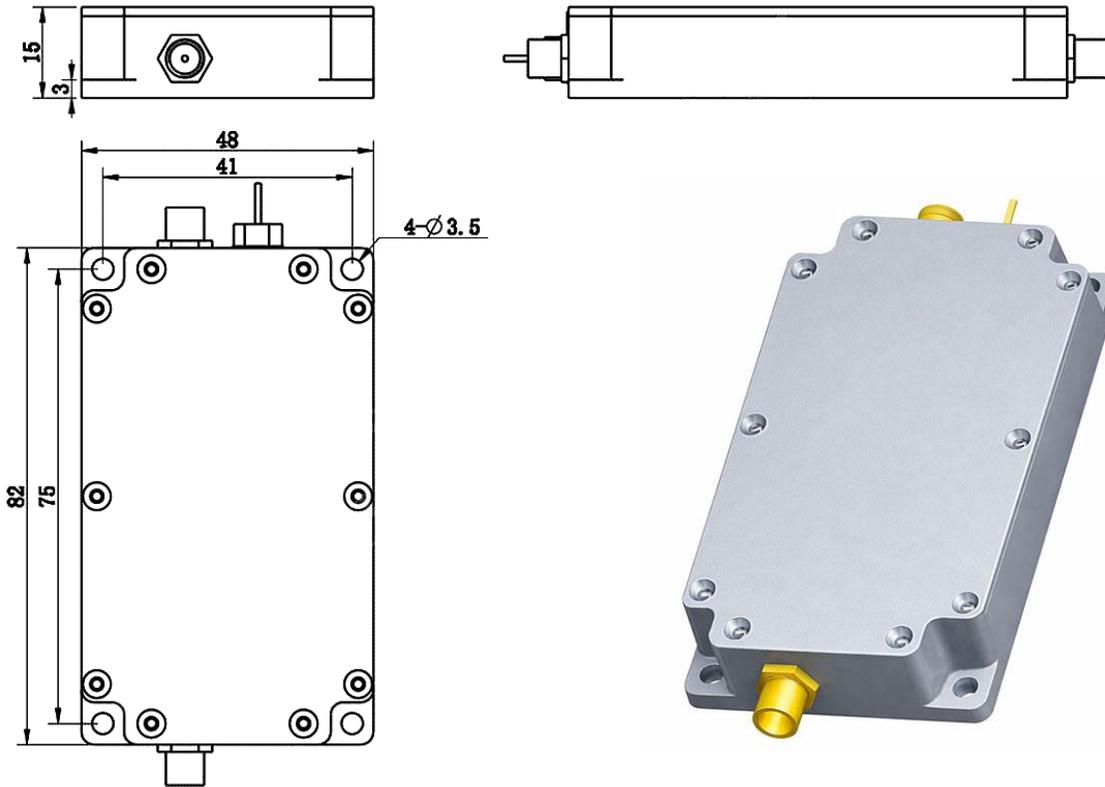

\*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

### Ordering Information \*

	20	300	5	11	<input type="checkbox"/>
Prefix	Low Frequency	High Frequency	Output Power	Connector	Package *
RFAF-	20MHz = 20	300MHz = 300	5W = 5	SMA = 11	Device = 1 Module = 2 Benchtop = 3

\* The module is a small metal box integrated with a power supply. Benchtop is a plug-play unit with metal cover