

MEMS Octo Series Fiber Optic Switch

(Bidirectional, Octo 1x2, Octo Full 2x2)

(Protected by US Patent 10752492B2)



DATASHEET

BUY NOW



Features

- High Reliability
- Low Optical Distortions
- Intrinsic tolerance to ESD

Applications

- Channel Routing
- Configurable Add/Drop
- System Monitoring
- Instrumentation

The MEMS Octo Series 1x2, Full 2x2 Fiber Optic switch integrates 8 Full 2×2 switches in a single compact format. It is designed for 40G transceiver bypass application. The device connects optical channels by redirecting incoming optical signals into selected output fibers. This is achieved using a proprietary MEMS configuration and activated via an electrical control signal. It uniquely features rugged thermal activated micro-mirror movement instead of rotation, and the novel design significantly simplify the control electronics, offering unprecedented high stability and an unmatched low cost.

We also offer the built-in driver version, which features a convenient user interface.

Specifications

| Parameter | | Min | Typical | Max | Unit |
|------------------------------------|-------------|--------------------------|---------|---------------------------|-------|
| Operation Wavelength | Single Mode | 1260~1610 | | | nm |
| | Multimode | 810~890 and/or 1260/1360 | | | |
| Insertion Loss ^{[1], [2]} | | | 0.6 | 1.0 (1.2 ^[3]) | dB |
| PDL (Single mode) | | | | 0.1 | dB |
| Return Loss ^[1] | Single Mode | 50 | | | dB |
| | Multimode | 35 | | | |
| Cross Talk ^[1] | Single Mode | 50 | | | dB |
| | Multimode | 35 | | | |
| Switching Time | | | 5 | 10 | ms |
| Repeatability | | | | ±0.05 | dB |
| Repetition Rate | | | 10 | | Hz |
| Durability | | 10 ⁹ | | | Cycle |
| Switching Type | | Non-Latching | | | |
| Operating Temperature | | -5 | | 70 | °C |
| Storage Temperature | | -40 | | 85 | °C |
| Optical Power Handling (CW) | | | 300 | 500 | mW |

Notes:

[1]. Excluding connectors.

[2]. Multimode IL measure @ Light Source CPR<14 dB.

[3]. Dual band.

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 02/08/24

© Photonwares Corporation

P +1 781-935-1200

E sales@photonwares.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. Photonwares reserves the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Photonwares Corporation in the U.S. and other countries.

MEMS Octo Series Fiber Optic Switch

(Bidirectional, Octo 1x2, Octo Full 2x2)


(Protected by US Patent 10752492B2)




DATASHEET

Mechanical Dimensions (mm)

1. Standard Package

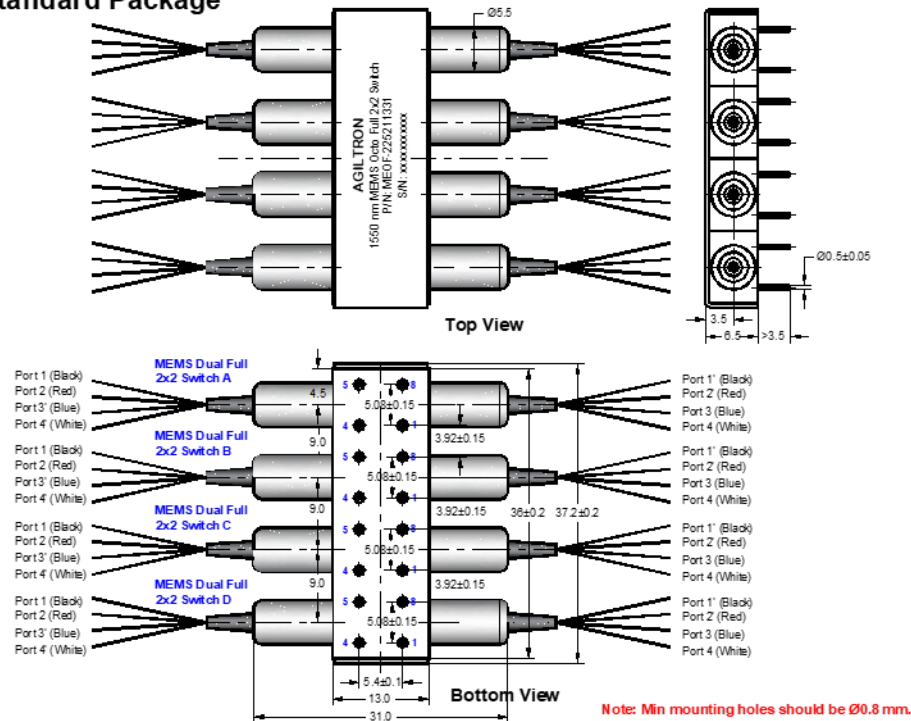

2. With Insulating PCB Package

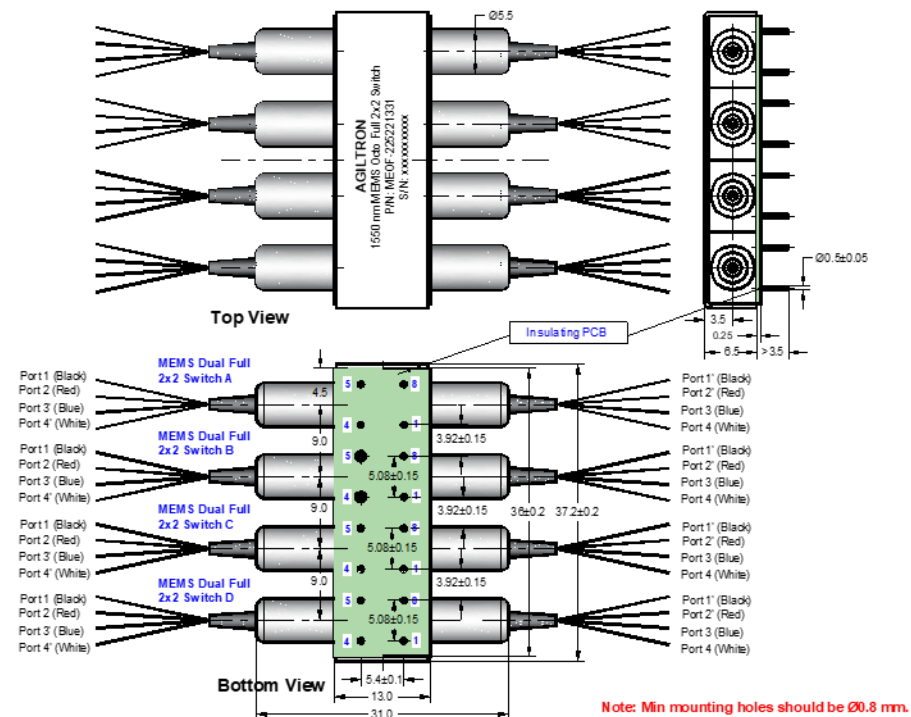

* Product dimensions may change without notice. This is sometimes required for non-standard specifications.

MEMS Octo Series Fiber Optic Switch

(Bidirectional, Octo 1x2, Octo Full 2x2)

(Protected by US Patent 10752492B2)



DATASHEET

Electrical Driving Requirements



| Status | Optical Path | | Pin No. | | | |
|-----------|------------------------|--|---------|-------|-------------------|-------|
| | Octo 1x2 | Octo Full 2x2 | Pin 1 | Pin 8 | Pin 4 | Pin 5 |
| Status I | Port 1→1' Port 2→2' | Port 1→1' Port 2→2' Port 3→3' Port 4→4' | +V | 0 | NC ^[1] | NC |
| Status II | Port 1→4' Port 2→3' | Port 1→4' Port 2→3' Port 3→2' Port 4→1' | 0 | | | |

| Driving Voltage | Min | Typical | Max | Unit |
|-------------------|-----|--------------------|-----|------|
| +V | 3.8 | 4.0 | 4.5 | VDC |
| Power Consumption | | 170 ^[2] | | mW |

[1]. NC: No electronic connection

[2]. For each MEMS Dual 1x2, or Dual Full 2x2 Switch

Functional Diagram

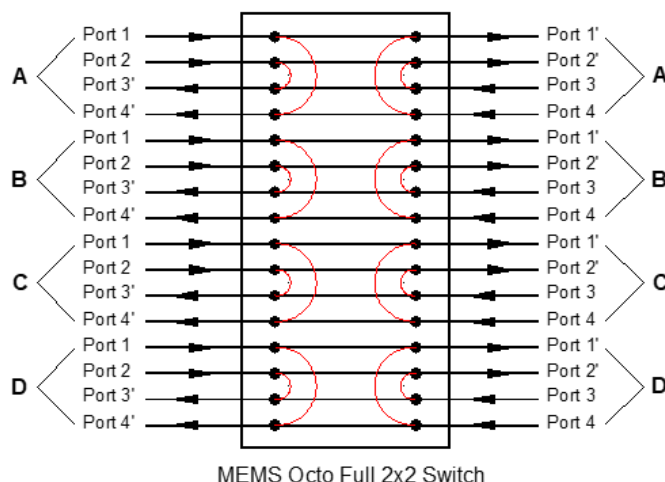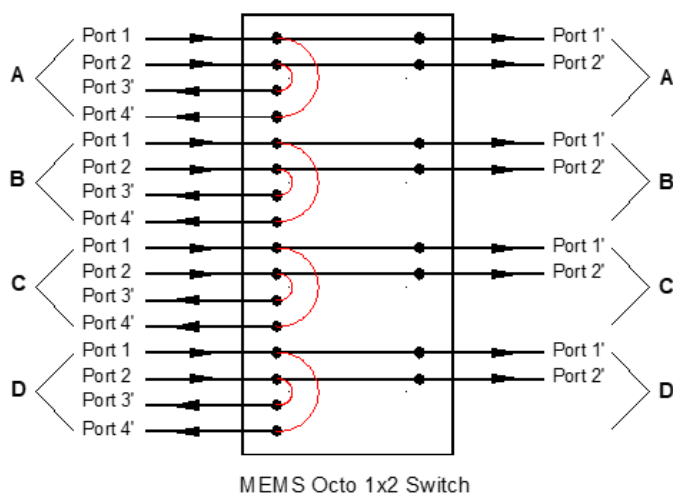

MEMS Octo Series Fiber Optic Switch

(Bidirectional, Octo 1x2, Octo Full 2x2)


(Protected by US Patent 10752492B2)



DATASHEET


10⁹ Switching Cycle Test

We have tested MEMS 1x2 switch at the resonant frequency ~300Hz for more than 40 days, as shown in the attachment, which corresponding over 10⁹ switching cycles. The measurements show little changes in Insertion Loss, Cross Talk, Return Loss etc., all parameters are within our specs.

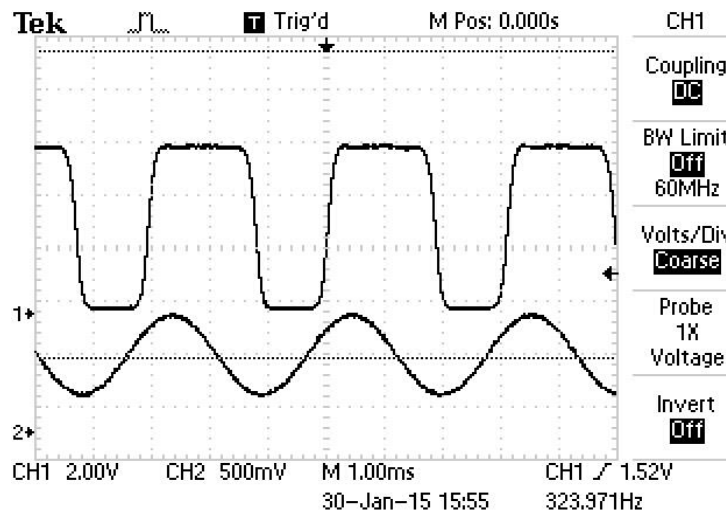

Typical Insertion Loss vs Wavelength (1240-1630nm)

1x2 MEMS Switch

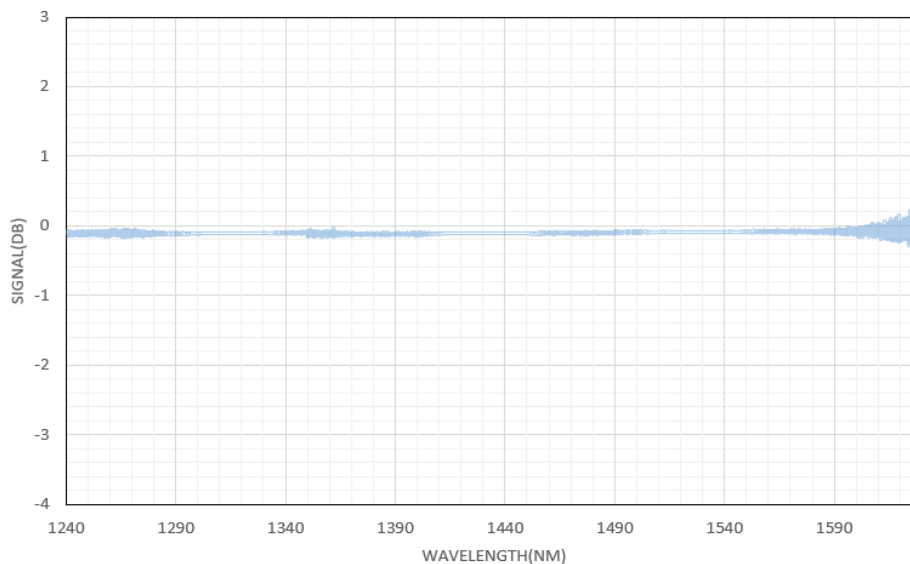

MEMS Octo Series Fiber Optic Switch

(Bidirectional, Octo 1x2, Octo Full 2x2)

(Protected by US Patent 10752492B2)



DATASHEET

Ordering Information

| Prefix | Type | Wavelength | Switch | Package | Fiber Type | Fiber Cover | Fiber Length | Connector |
|----------------------|----------|--|------------------|---------------------------------------|---|-------------------------------|-------------------------------------|---|
| MEMO- ^[1] | 1x2 = 12 | 1260~1620 = B | Non-Latching = 2 | Standard = 1 | SMF-28 = 1 | Bare fiber = 1 | 0.25m = 1 | None = 1 |
| MEOF- ^[2] | 2x2 = 22 | 1060 = 1 780 = 7 850 = 8 1310/1550 = 9 850/1310 = A Special = 0 | | WIP ^[3] = 2 Special = 0 | MM 50/125 = 5 MM 62.5/125 = 6 Special = 0 | 900um tube = 3 Special = 0 | 0.5m = 2 1.0m = 3 Special = 0 | FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 Duplex LC/PC = 8 LC/APC = A LC/UPC = U Special = 0 |

[1]. MEMO: MEMS Octo 1x2 Switch.

[2]. MEOF: MEMS Octo Full 2x2 Switch.

[3]. WIP: With Insulating PCB.

Application Notes

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters (<5 µm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the handling by expanding the core side at the fiber ends.