AGILTRON®

Return to the Webpage

Variable RF-Photonic Time Delay System

up to 50 GHz, ms long delay, ns fast delay change, 25-bit highest resolution

The Variable RF-Photonic Time Delay System (RPTD) is a fully integrated, turn-key solution that delivers precise, true-time delay of RF signals with direct RF input/output, eliminating the need for external RF amplifiers. Engineered over 15 years of refinement, the RPTD offers unmatched performance with delay lengths up to 50 ms, fast delay switching speeds down to 10 ns, high resolution up to 25 bits, and operation up to 50 GHz. Internally, the RF signal is converted to an optical signal and routed through a digitally controlled bank of optical fiber segments; delay variation is achieved by switching combinations of these segments using proprietary nanosecond-speed optical switches. Our low-intrinsic-delay optical amplifiers compensate for fiber and switch losses, while optional chromatic compensators and amplifier modules enable customization of link performance. The system includes built-in temperature monitoring, segment status diagnostics, and supports control via USB/GUI, RS232, and TTL through a D-sub connector; a touchscreen interface is available as an option. Ideal for radar testing, phased array systems, signal processing, and phase noise analysis, the RPTD offers greater flexibility and delay precision than traditional coax or waveguide systems. Users should specify the maximum required delay, the number of variable delay values, and the delay switching speed when ordering.

Features

- Switching Option Available
- Smaller Size and Less Weight
- 0.1 ~ 50 GHz Bandwidth
- Flat Phase Response
- Minimal Triple-Transit Echoes
- Low Link Loss Options
- Low-Temperature Sensitivity

Applications

- Radar System Testing
- Phased Array Antennas
- Signal Processing
- Electronic Warfare (EW) Systems

RoHS COMPLIANT

Specifications [1]

Parameter		Min	Typical	Max	Unit
Frequency Range		0.1	20	50	GHz
Delay Range		0.1		1000	µsec
Delay Accuracy [2]		0.1	1		ns
Delay Increment		0.1			ns
Delay Resolution			20	25	Bit
System Intrinsic Delay [3]			100	200	ns
Delay Changing Time	MEMS type		10000	20000	µsec
	CL type		50	100	
	NS type		0.1	0.3	
Changing Repetition Rate	MEMS type		0.01	0.02	kHz
	CL type		1	2	
	NS type		100	5000	
RF Insertion Loss [4]			0	10	dB
RF Response Flatness (within 1GHz)			± 0.5		dB
RF Input Level			-10dBm	0 [5]	dBm
SFDR			90		$dB/Hz^{2/3}$
VSWR[4]			1.5:1	1.8:1	
Noise Figure [4]			32	40	dB
Operating Temperature		–20		+50	°C
Storage Temperature		–40		+80	°C
Power Supply		110		240	AVC
Power Consumption				250	W
Size		19" mount rack			

Notes:

[1]: These specs generically cover the achievable performances, such as in an RPTD system with 20Bit, 20GHz, and 0.1ms of delay in max, which will be finalized in detail for the RPTD system per the customer's requests of RF frequency, delay bit resolution, switch type, maximum delay.

[2] It is defined @ maximum delay <=10us.

[3] Depending on the bit number N and switch type, such as 100ns for 19-bit, 80ns for 17-bit, and 70ns for 16-bit in MEMS type.

[4]: It is defined @ 20GHz and 16-bit as well as 100us delay in max.

[5]: Insertion loss could be ~10dB.

P +1 781-935-1200 E sales@agiltron.com W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

Variable RF-Photonic Time Delay System

up to 50 GHz, ms long delay, ns fast delay change, 25-bit highest resolution

Optical Path Diagram

Switchable fiber loops in series

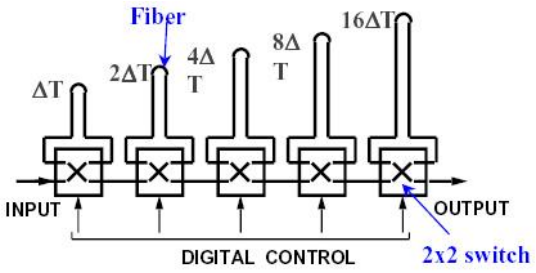

The variable time delay module selectively routes optical signals through N fiber segments having different lengths. Each fiber segment is defined to have the delay as

$$\Delta T_i = 2^{(i-1)}\delta T,\ i = 1, 2, ..., N$$

Where δT is the increment of time delay. Therefore, the module provides N-bit of digitally variable time delay, having the total time delay as

$$\Delta T_{Total} = (2^N - 1)\delta T$$

N and δT are defined by the customer.

Enclosure Dimension (mm)

Typical 10U 19" rack for 16-19 bit system with the maximum delay of 0.1 ms

Width of panel:	482 mm
Width of rack:	440 mm
Max. deep of rack:	750 mm

6U rack

12U rack

P +1 781-935-1200 E sales@agiltron.com W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

Variable RF-Photonic Time Delay System

up to 50 GHz, ms long delay, ns fast delay change, 25-bit highest resolution

48U rack

Control Interface

Touch-screen, TTL, USB, ethernet
Can be customized.

Touch-screen with TTL



Front View

Touch-screen with USB

Ethernet only

P +1 781-935-1200 E sales@agiltron.com W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

Variable RF-Photonic Time Delay System

up to 50 GHz, ms long delay, ns fast delay change, 25-bit highest resolution

Typical Responses (20GHz, 19 bit resolution, 1ms max delay)

S21

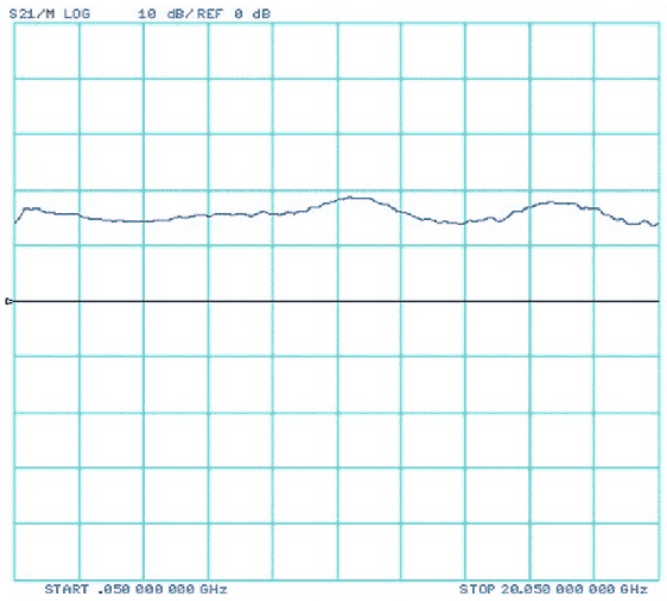

S11

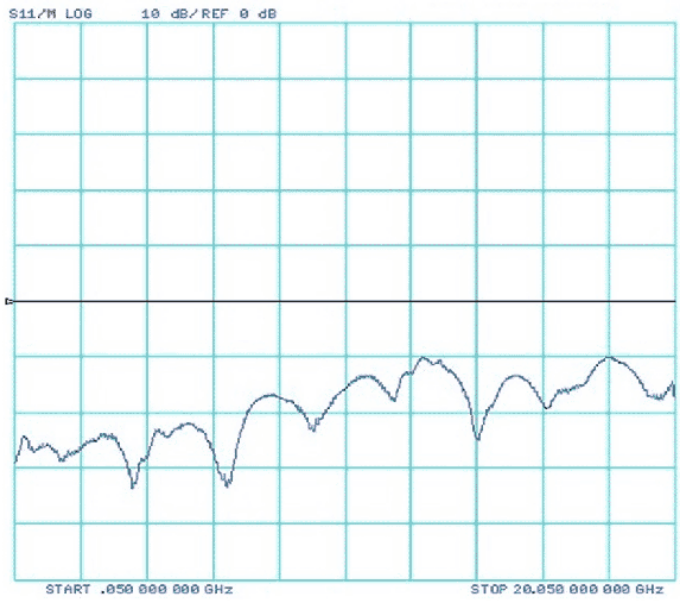

RF Output Spectrum

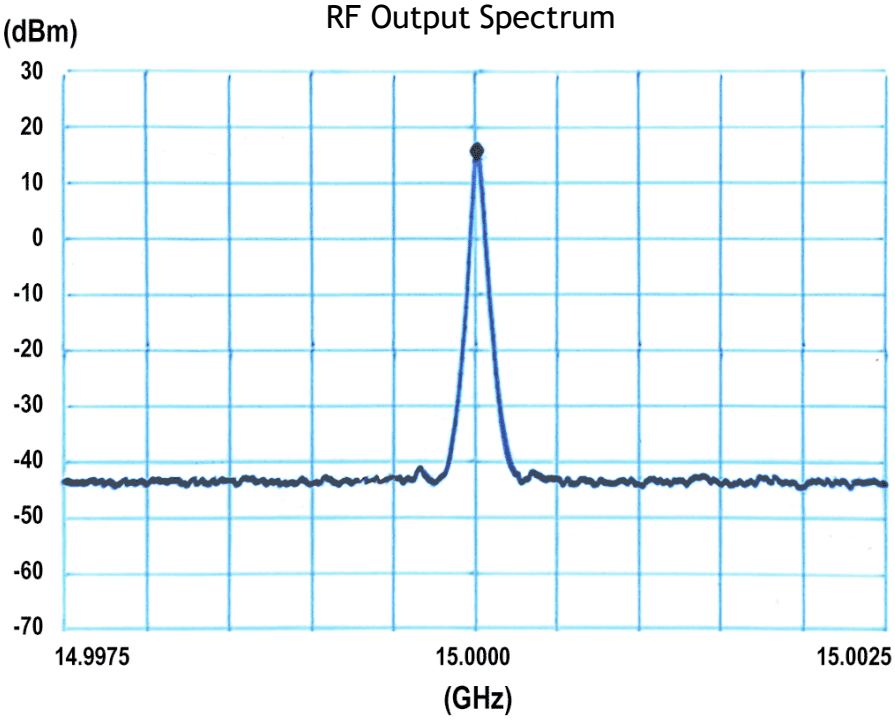

P +1 781-935-1200 E sales@agiltron.com W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

Variable RF-Photonic Time Delay System

up to 50 GHz, ms long delay, ns fast delay change, 25-bit highest resolution

Ordering Information (Part Number)

	☐☐	☐	☐	☐	☐	☐	☐	☐
Prefix	**Variable Delay Resolution**	**RF Frequency**	**Rack Size**	**Control [1]**	**Switch Speed**	**LCD Display [2]**	**Max Delay**	**RF Connector [3]**
RPTD-	19-bit = 19 17-bit = 17 16-bit = 16 15-bit = 15 14-bit = 14 13-bit = 13 12-bit = 12 11-bit = 11 10-bit = 10 9-bit = 09 8-bit = 08	0.1 ~ 6GHz = 1 1 ~ 20GHz = 2 1 ~ 35GHz = 3 1 ~ 40GHz = 4 1 ~ 50GHz = 5 Special = 0	2RU = 2 4RU = 4 6RU = 6 10RU = L 12RU = U 14RU = X Special = 0	TTL = 1 USB = 2 RS232 = 3 Special = 0	MEMS (5ms) = M CLSW (10µs) = C NSSW (100ns) = N	No = 1 Yes = 2 Special = 0	1 µs = 1 10 µs = 2 100 µs = 3 1 ms = U 10 ms = V Special = 0	SMA = 1 K type = 2 Special = 0

[1]: Repeat rate > 2kHz must use TTL control due to computer limitation.

[2]: The functionality will be defined per the customer's request later.

[3]. The default connector configuration uses fiber with 0.9 mm buffer protection. The connector cannot be installed directly onto bare fiber because the bare fiber is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer may remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5 W for SMF-28 fiber and decreases further for smaller-core fibers.

Laser Safety

This product meets the appropriate standard in Title 21 of the Code of Federal Regulations (CFR). FDA/CDRH Class 1M laser product. This device has been classified with the FDA/CDRH under accession number 0220191. All versions of this laser are Class 1M laser products, tested according to IEC 60825-1:2007 / EN 60825-1:2007. An additional warning for Class 1M laser products. For diverging beams, this warning shall state that viewing the laser output with certain optical instruments (for example eye loupes, magnifiers, and microscopes) within a distance of 100 mm may pose an eye hazard. For collimated beams, this warning shall state that viewing the laser output with certain instruments designed for use at a distance (for example telescopes and binoculars) may pose an eye hazard.

Wavelength = 1.3/1.5 µm.

Maximum power = 30 mW.

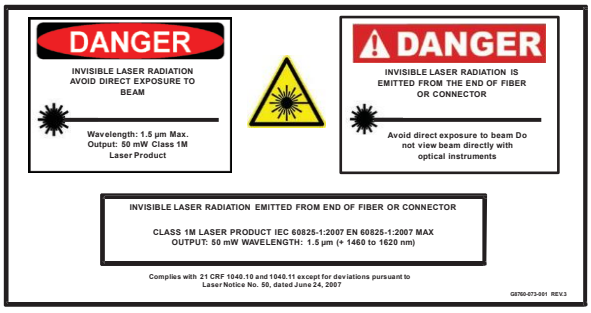

*Caution - Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

*IEC is a registered trademark of the International Electrotechnical Commission.

P +1 781-935-1200 E sales@agiltron.com W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

Variable RF-Photonic Time Delay System

up to 50 GHz, ms long delay, ns fast delay change, 25-bit highest resolution

Application Notes

Fiber Core Alignment
Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness
Fibers with smaller core diameters (<5 μm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power
Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.