SM RGB Laser Combiner

(2, 3, or more wavelengths in visible)

DATASHEET

Return to the Webpage

The LCSM Series single mode fiber RGB combiners are based on Agiltron's fused biconical taper technology and compact packaging structure. They enable any two, three or more primary colors in the visible wavelength region to be combined. Configurations are available for full RGB colors of red/green/blue. It features good uniformity, low excess loss and very low polarization sensitivity.

Couplers are highly efficient in splitting light with little loss, about 0.2dB per joint, but incur significant losses when combining lights; for example, a 50/50 coupler produces a 50% loss to each beam when combined. For beam-combining applications, search Combiner.

Features

- Low Loss
- High Stability
- High Reliability

Applications

- Display
- Biomedical Imaging
- Full-color Digital Hologram

Specifications

Parameter	Min	Typical	Max	Unit
Center Wavelengths (λ_C)		640/520/488 or specify		nm
Insertion Loss [1], R, G, B inputs to output @ λ_C		0.8	1.2	dB
Thermal Stability		< 0.005		dB/°C
Directivity		> 50		dB
Return Loss [2]		> 50		dB
Power Handling		100		mW
Fiber		460-HP		
Operating Temperature	0		65	°C
Storage Temperature	-40		85	°C

Notes:

[1]. Without connector. Each connector adds 0.3dB and 0.5dB for short wavelength

[2]. Without connector. Each connector adds 5dB

* With connectors, IL+1.5dB, RL-5dB and optical power handling reduces to 50mW.

Note: The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [click this link]:

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 07/17/25

SM RGB Laser Combiner

(2, 3, or more wavelengths in visible)

DATASHEET

Mechanical Dimensions (mm)

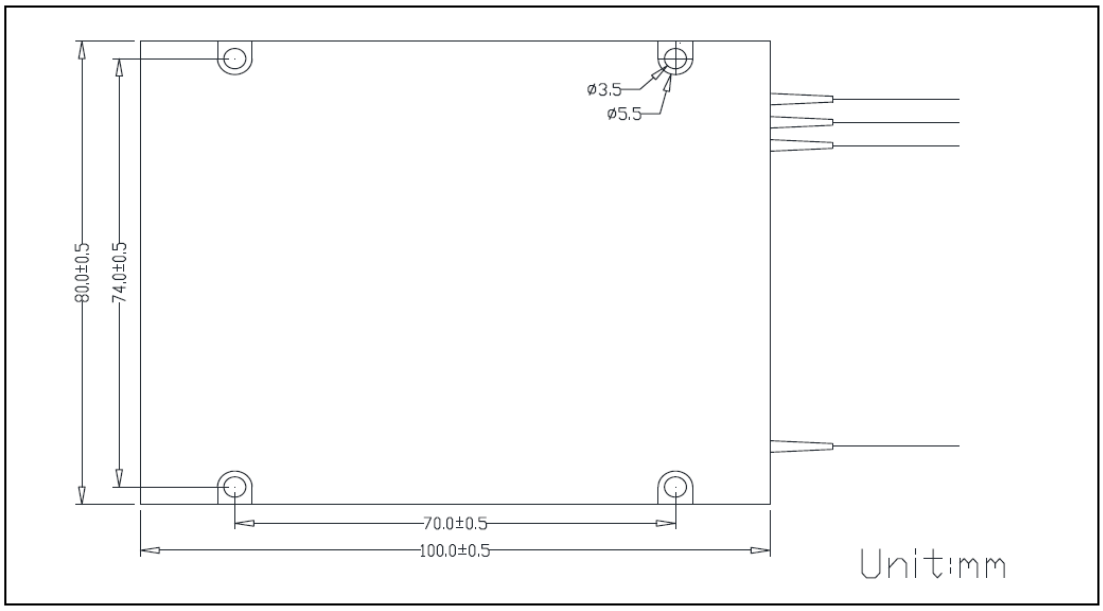

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Ordering Information (Part Number)

	☐	☐	☐	☐	☐	☐	☐	☐	☐
Prefix	**Type**	**Color 1**	**Color 2**	**Color 3**	**Package Type**	**Fiber Type**	**Fiber Cover**	**Fiber Length**	**Connector[2]**
LCSM-	Tow colors = 2 Three colors = 3 Four colors = 4 Special = 0	Red = 1 Green = 2 Blue = 3	Red = 1 Green = 2 Blue = 3	Red = 1 Green = 2 Blue = 3	Standard = 1 Aerospace [1] = A Special = 0	460-HP = 1 SM1950 = 2 Special = 0	Bare fiber = 1 900um tube = 3 Special = 0	0.5m = 1 1.0m = 2 1.5 m = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 LC/APC = A LC/UPC = U Special = 0

[1]. Aerospace-grade package featuring an aluminum metal casing filled with a specially formulated RTV compound that is both vibration-resistant and thermally conductive, specifically designed to endure repeated thermal shock cycles from -45°C to 90°C.

[2]. The default connector configuration uses fiber with 0.9 mm buffer protection. The connector cannot be installed directly onto bare fiber because the bare fiber is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer may remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5 W for SMF-28 fiber and decreases further for smaller-core fibers.

Information contained herein is deemed to be reliable and accurate as of the issue date. Photonwares reserves the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Photonwares Corporation in the U.S. and other countries.

Application Notes

Fiber Core Alignment
Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness
Fibers with smaller core diameters (<5 μm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power
Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.

Information contained herein is deemed to be reliable and accurate as of the issue date. Photonwares reserves the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Photonwares Corporation in the U.S. and other countries.

SM RGB Laser Combiner

(2, 3, or more wavelengths in visible)

DATASHEET

Regular Single Mode / Polarization Maintaining Fiber Optical Power Handing vs Wavelength

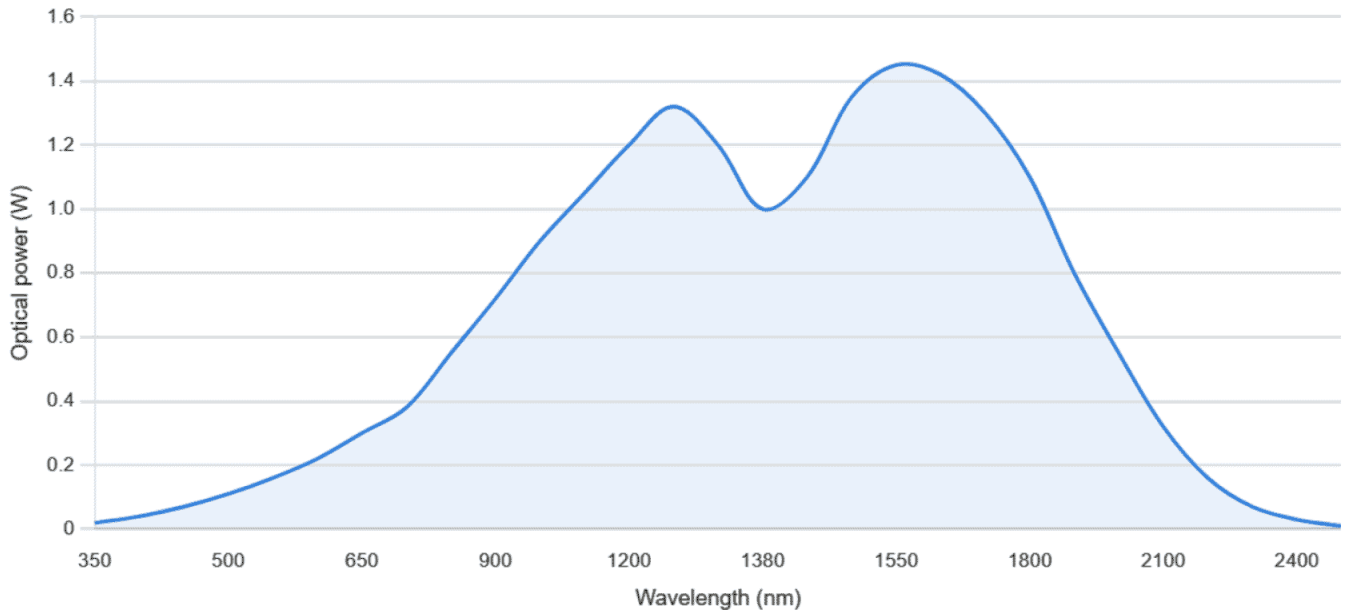

Single mode fiber optical power is limited by nonlinear effects in addition to absorption that increase loss and generate heat. The curve shows the approximate safe CW power envelope for standard single-mode fiber. Actual limits depend on fiber design, core size, length, and laser characteristics. Specialty fibers can significantly increase the power limit.

Information contained herein is deemed to be reliable and accurate as of the issue date. Photonwares reserves the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Photonwares Corporation in the U.S. and other countries.