

Inline Polarization Rotator

45, 90 degree rotations, 1060, 1310, 1480, 1550nm



DATASHEET

BUY NOW



The INPR series Faraday device rotates the state of polarization (SOP) 45 or 90 degrees from input light to output fiber. Our unique design and process feature low insertion loss with a compact size and epoxy-free optical path.

Features

- Low Insertion Loss
- High Isolation
- Low PDL
- High Reliability
- Low Cost

Applications

- Fiber Interferometer
- Fiber Laser
- Fiberoptic Sensor
- Brillouin Amplifier
- Fiberoptic Module

Specifications

Parameter	Min	Typical	Max	Unit
Central Wavelength (λ_c)	1060, 1310, 1480, 1550			nm
Spectral Width		± 20		nm
Insertion Loss ^[1] (23°C, no connector)		0.5	1	dB
Polarization Rotation Angle (λ_c , 23°C)	88	90	92	deg
Return loss		≤ 50		dB
Polarization Extinction Ratio		20, 26, 30		dB
Operating Temperature	-10		+70	°C
Storage Temperature	-40		+85	°C
Optical Power Handling		≤ 500		mW

Notes:

[1]. For 1060nm, Il is about 1.2dB

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 02/22/24

© Photonwares Corporation

P +1 781-935-1200

E sales@photonwares.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. Photonwares reserves the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Photonwares Corporation in the U.S. and other countries.


Inline Polarization Rotator

45, 90 degree rotations, 1060, 1310, 1480, 1550nm



DATASHEET

Mechanical Dimension (mm)

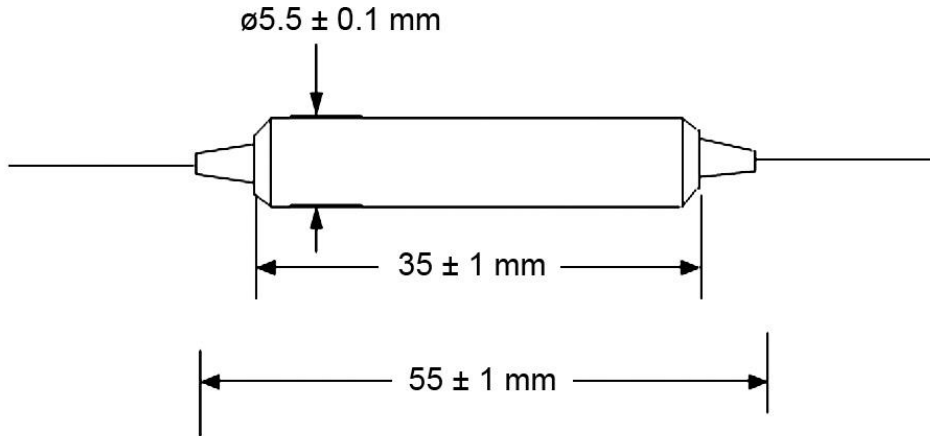

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Ordering Information

Prefix	Type	Wavelength	PER	Package	Fiber Type	Fiber Cover	Fiber Length	Connector
INPR-	45° = 11 90° = 22	1310 = 3 1480 = 4 1550 = 5 Special = 0	20dB = 1 26dB = 2 30dB = 3	$\varnothing 5.5 \times 20 = 1$ Special = 0	SMF-28 = 1 PM1550 = 2 PM1310 = 3 Hi1060 = 4 PM980 = 5 Special = 0	0.9mm Loose Tube = 3 Bare Fiber = 1 Special = 0	0.25m = 1 0.5m = 2 1.0m = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 LC/APC = A LC/UPC = U Special = 0

Inline Polarization Rotator

45, 90 degree rotations, 1060, 1310, 1480, 1550nm



DATASHEET

Application Notes

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters (<5 μm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the handling by expanding the core side at the fiber ends.